On Detecting Hidden Third-Party Web Trackers with a Wide Dependency Chain Graph: A Representation Learning Approach*

Amir Hossein Kargaran*, Mohammad Sadegh Akhondzadeh*, Mohammad Reza Heidarpour*,

Mohammad Hossein Manshaei*, Kave Salamatian[†], Masoud Nejad Sattary[‡]

*Isfahan University of Technology, Iran

{kargaran,ms.akhondzadeh}@ec.iut.ac.ir {mrheidar,manshaei}@iut.ac.ir

[†]Universite de Savoie, France

kave.salamatian@univ-smb.fr

[‡]Chavoosh ICT, Isfahan, Iran

Sattary@chavoosh.com

Abstract-Websites use third-party ads and tracking services to deliver targeted ads and collect information about users that visit them. These services put users privacy at risk and that's why users demand to block these services is growing. Most of the blocking solutions rely on crowd-sourced filter lists that are built and maintained manually by a large community of users. In this work, we seek to simplify the update of these filter lists by automatic detection of hidden advertisements. Existing tracker detection approaches generally focus on each individual website's URL patterns, code structure and/or DOM structure of website. Our work differs from existing approaches by combining different websites through a large scale graph connecting all resource requests made over a large set of sites. This graph is thereafter used to train a machine learning model, through graph representation learning to detect ads and tracking resources. As our approach combines different sources of information, it is more robust toward evasion techniques that use obfuscation or change usage patterns. We evaluate our work over the Alexa top-10K websites, and find its accuracy to be 90.9% also it can block new ads and tracking services which would necessitate to be blocked further crowd-sourced existing filter lists. Moreover, the approach followed in this paper sheds light on the ecosystem of third party tracking and advertising.

I. INTRODUCTION

The underlying business model of Internet growth that is mainly based on free access to online resources has driven a full industry of targeted advertisements that generate revenue for the content providers. These advertisements are delivered through online services that we name *first-party* throughout the paper. These advertisement and related services are often served in the form of *scripts* and sub-documents, *i.e.*, *Iframes*, that are inserted in web pages in order to provide customized ads or to provide web analytics [29]. These tracking services track users' behavior in order to generate for the user customised ads, but at the cost of users' privacy.

In recent years, many researches engaged in preserving user's privacy by analyzing the ads and tracking ecosystem [8]. Several ad-blocking tools, such as *Ghostery* [19], *No Script* [35], *Adblock* [1], *Adblock Plus* [2], *Disconnect* [9], and *Privacy Badger* [37] have been developed. According to PageFair, more than 700 million people were using adblockers at the end of 2019 [36]. These tools generally leverage filter lists that are usually created by a community of users [47]. As trackers change frequently their behavior to evade detection techniques and develop continuously new tracking technique, the filter lists and rulesets used for detecting trackers and advertiser have to be regularly updated to remain effective. Moreover, sites in specific geographic and linguistic area might have less frequent trackers that are not reported in popular adblock lists [14], [21], [41], [44].

Let's illustrate the issues by looking at *latercera.com*, the website of a daily newspaper in Chile. When opening this site the browser downloads many objects, *e.g.* images, videos, documents, and scripts, that belongs either to first (the newspaper itself) or third-parties (*e.g.* advertisers, tracker and web analytic services). It is also likely that some of these objects load other related objects. One can find on *latercera.com* website more than 50 third-party services, many of them being uploaded by a small number of third-parties object that are directly inserted into the source code of the website. We will call in the forthcoming these indirect third-parties *bounced* third parties. We show in Fig. 1 some of the third-parties observed at *latercera.com* site and their relations.

Fig. 1 shows that three major third parties {*doubleclick.net*, *googletagmanager.com*, *googlesyndication.com*} introduce most of other third-parties. While popular filter lists (such as EasyList [11] and EasyPrivacy [12]) can be used to block most of these trackers, but the two services hashed in Fig. 1, {*sparkflow.net*, *adledge.com*} are not blocked individually as there does not exist any rule relative to them.

Updating filter lists entails detecting and labelling the unknown third-party service as ad/tracker and inserting novel rules in filter lists. Some features can be used to separate ad or tracker services from more innocuous services. The first

^{*}This research was supported by the Institute for Artificial Intelligence (iai.iut.ac.ir) under a generous grant by Mr. Farhad Rahnema.




Fig. 1: The graph relative to third-parties communications in *latercera.com*. In this graph, nodes that depend of other node are linked via a directed edge.

feature is the observation rate among different websites, *i.e.*, third-party trackers are generally observed in several websites. Indeed the issue there is to choose a significant number of appearance for detecting a tracker. The second feature is the web of relationships among third parties. Trackers interact with each others in order to grow their business and access to more data. One can leverage these interaction in order to detect trackers. The last feature is the specific behaviors of trackers. In particular, trackers have to send the collected information to their servers, generating traces that can be used to identify them. By combining these feature needs large-scale data collection and analysis.

There has been significant prior works on automating tracker detection and updating filter lists. These previous works either do not cover all websites objects, *e.g.*, only JavaScripts or HTTP requests are exploited [7], [20], [23], [27], [48], [51], [10], or they do not look at multiple websites and they make decision solely based on the objects in each individual website [26], [8], [41]. Usually, models trained separately over each single website, might see a given tracker several times during the training or testing phase, generating biases for frequently seen trackers. However, in our work we are using each tracker service only one time, even if it is repeated in several websites, reducing the bias.

In this paper we develop an approach based on a single large *web graph* capturing dependencies between trackers. This graph is expanded during the crawling of websites by adding new observed third-parties. This is web graph is used in order to detect and label new trackers by a supervised machine learning model. The contributions in this paper can be summarized as follows:

 We define a directed graph, named wide dependency chain graph (*WideGraph*), that models relation between third party services over the whole crawling history. *WideGraph* node consists of different types of objects: scripts, Iframes, and requests, *etc.*, observed during the websites crawl. Two nodes are connected if the source node invokes the destination node, *e.g.*, a website node is connected to a third party node if the third party is called directly in the website page code.

- 2) We apply to the *WideGraph* a new and modified **graph representation learning** algorithm that targets automatic extraction of tracker features.
- 3) We also develop an **effective method for extracting keywords** that extracts the most useful keywords from the URL requests and assigns a weight to it based on its relative frequency in other tracker URLs. These keywords along with their weights can be used to refine trackers detection.
- 4) Finally we develop a supervised machine learning classifier that get two category of inputs : structural properties, *i.e.* the *WideGraph*, node relations and content based features, 1.e. keywords and their weights. We show that after training, the Random Forest model can retrieve with 96.1% biased and 90.9% unbiased accuracy, labels assigned by existing filter list and we moreover uncover more new trackers that were unreported.

In the forthcoming we will address advertisement and tracker services as "*AdTrackers*" as it is frequently difficult to separate this two roles and we are aiming into detecting both.

The rest of the paper is organized as follows. In Section II, we introduce our methodology and the needed background. In section III, we nominate our classification model. In Section IV, we present the results of our experiments. In Section V, we relate our work to state-of-the art in the field. Finally, we give our final remarks in Section VI.

II. METHODOLOGY

In this section, we present needed background and our methodology to identify third-party trackers. We show in Fig. 2 a summary of the methodology.

A. Background

A user connecting to a website provides a lot of information that might be considered as private, like IP address, browser parameters, etc., that even enable to identify the user through fingerprinting [34], but are nonetheless needed for operational purpose of getting connected top the website. However, this generate a privacy problem when the website (first-party), exchange some of these information, or give access to some details of user connection. This access can be done consciously by the first party to gather some benefit from advertisement, or unconsciously by embedding third-party services that might be beneficial to the user or the content provider. By harvesting information from a large number of individual websites, the "personal data" industry can gather fine grain and precise information about the users that enable them to profile the user and to jeopardize their privacy [5], [13], [29], security [18], [30], [32], users satisfaction [36] and performance [17], [38]. We show in Fig. 3 how third party trackers generate ads targeted to each visitor. Trackers can harvest information

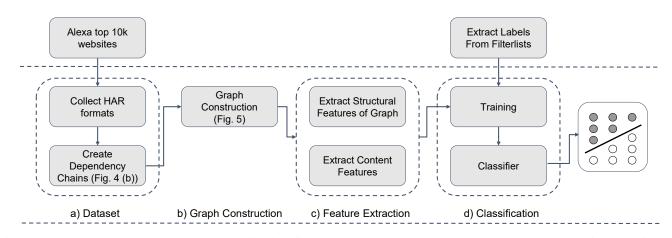


Fig. 2: Methodology overview: (a) Dataset collection from the top 10k Alexa websites and dependency chain extraction, (b) Dependency chains merging, (c) *WideGraph* extraction, (d) Machine learning training and classification of sub-domains into two class of "ad/tracker" and "non-ad/tracker".




Fig. 3: Targeted ad mechanism : every time a user opens a website, the browser makes, along with the request to the web server, several other requests other servers that inform them of the visit of the user. By gathering these information the advertiser generate a profile for the user and propose him a targeted ad.

through different means. However, Javascripts and Iframes are frequently used because of ease of placement in first-party codes. An added script from a third party might only contact its home server, or it might connect to several other third parties, bounced one, and transfer them information, i.e., a JavaScript from a third party might load additional JavaScript coming from other third parties. These later connections are more difficult to detect and to address as they are not directly seen in the first party code. The calling relationship among downloaded objects creates a dependency chain among objects in a web session [24]. For example in Fig. 4-b we show this dependency chain for a website as directed edge in a graph. As we highlighted in this figure the web page contains a JavaScript from Domain 5 that loads three other JavaScripts from domains 3, 4, and 6, and the JavaScript from domain 4 makes a request to the domain 4 server.




Fig. 4: bipartite graph VS Dependency chain graph: Each node represents a unique domain in this figure. a) in a bipartite graph all third-party services are connected by nodes connected root. b) in dependency chain each edge represents a calling relation, source node has called destination node.

Adblockers are effective methods to block trackers. They use filter lists that help in detecting and removing unwanted contents in web pages. The filter lists define a set of rules that might be based on keyword or specific patterns. However, these list have to be updated frequently to adapt to behavior change of trackers that find themselves on filter lists [25]. Another relevant dimension is that in order to detect ads, adblockers have to check a large number of rules, resulting in increased load on the user computer and in large delay [46]. Therefore filter list have also to be regularly purged from nonpertinent rules that slow the browsing experience. All these element point toward to importance of developing automated methods for detecting tracker and managing filter list in an efficient way.

B. Dataset

We used the sites in the top 10K lists of Alexa, showing the 10K websites with the highest number of visit [4]. We used an instrumented *Chromium* browser controlled with the *Selenium* [40] browser automation tool. This tool enables us to automate web-based tasks, especially crawling jobs. We used this instrumented browser to visit each of the 10K websites and to collect all web browser's interaction, *i.e.*, URLs, script or objects fetched by the browser).

During these crawling experiences we observed that tracker objects are both injected offline, *i.e.* embedded into web page code, and online, *i.e.* generated in real-time by another object, e.g., JavaScript or active servers. The online method is used in order to prevent the tracker from being easily detected by adblockers. The online and active generation of trackers make mandatory to implement a dynamic analysis of web browsing in order to find all trackers. For this purpose we used a feature of the Chromium's developer tools. Chromium is able to store the HTTP transactions between user and browser in an archival format named har Format [33]. In har format, each requested object has an "initiator" element, that describe the web resource that have initiated the requested object. In other terms, when we load a web page, all requests, e.g., XMLHTTP, Style Sheets (CSS), Scripts (Javascrips), Iframes, Medias (e.g., images and videos) will be stored in the har archive with a labelled initiator. We also set the timeouts for the web driver of Chromium to be large enough to download an render completely all elements of the page and to avoid stalled crawls. In our final dataset, we attained a downloads success rate of 84% for all elements of the top 10K Alexa websites.

C. Graph Construction

After obtaining the har archive relative to a website connection, we first gather all URLs involved in the web session. For each URL, the har archive also contains its corresponding "initiator" element which has requested the download of that URL. Therefore, for each website, we can characterize a dependency chain in which initiating objects within the source URL (the website's URL) are linked towards their requested URLs to be downloaded. Initiating objects can take different forms: JavaScript, Media (Images, Videos), Iframes, or other types of requests, e.g. XMLHTTP requests. For each first party's website, we regroup those URLs with the same domain as that of the first party website into one node ¹. This (super) node indeed represents the whole objects belonging to the first party website. We call this regrouping procedure as the path contraction step. From this first party domain, there are several links that connect it to third parties. The interaction with the third parties can take different forms. In this paper we consider 4 different types of interactions, namely, the Javascript, the Media, the Iframe, and the Other. Accordingly, for each third party domain, we maintain up to 4 nodes, each

representing one of the interaction types. Therefore, a URL, belonging to a particular third party domain, links the first party domain hosting its initiating element to one of the 4 nodes of that third party. Furthermore, inside each third party node, we maintain several "documents", each for a particular sub-domain of that third party, as information elements that resort the content of the incoming URLs. These are these documents that finally get classified into tracker or non-tracker categories. Until now, for each given first party website, we can consider a directed tree rooted from the node labeled with the first party's domain and branches to third parties' nodes, each labeled with the corresponding third party's domain name and the type of interaction that leads to this node. In order to not loose the relationship between first party domain (root) and nodes that are not directly connected to it, *i.e* bounced third parties, we add virtual edges connecting the root to bounced third party domains and label them with Bounced. We call this last step *edge expansion*.

After constructing trees for individual first parties' websites, we fusion all trees into a single graph. This graph is obtained by merging third party nodes (and their nested documents) in different trees that have the same domain and same interaction labels. This means that two third party nodes with the same domain and interaction label get merged into a single node but with the edge set that is the union of the two pre-fusion edge sets. It should be noted that sub-domain documents inside each of a third party's nodes, after the fusion, are also updated to resort the information of all incoming edges (URLs). The resulting merged graph is called the "*WideGraph*". We show all steps involved in building the *WideGraph* in Fig. 5.

WideGraph have some interesting properties: -First Wide-Graph combines all information relative to third parties ecosystem into a single and holistic graph representation. Third party nodes capture all the observed interactions as well as all information captured by the third parties. We will see later the major advantage of this representation when it comes to detecting tracker third parties. -Second, each type of interaction of a third party domain appears at most once in the WideGraph. The number of outgoing edges of a first party represents the number of third parties that are contacted when a user get to this domain. Some of these third parties are contacted directly while some are contacted through intermediaries. The number of incoming edges to a third party node (only third parties have incoming edges), represents how many other domains send information to it. We define for each third party a "direct coverage" value that represents the percentage of first party nodes that are connected directly to it through an edge with label Bounced, and an "indirect coverage" value that represents the percentage of first party nodes that have a path connecting them to this third party. The direct coverage shows the proportion of first party sites where the third party can track a user through direct information transfer and the indirect coverage shows the potential portion of first party sites where the the third party can track the user. Another metric of interest is also the average path length between first party and third parties. -Third, There

¹ We have used the *tldextract* tool to extract the top level (main) domain of URLs [45].

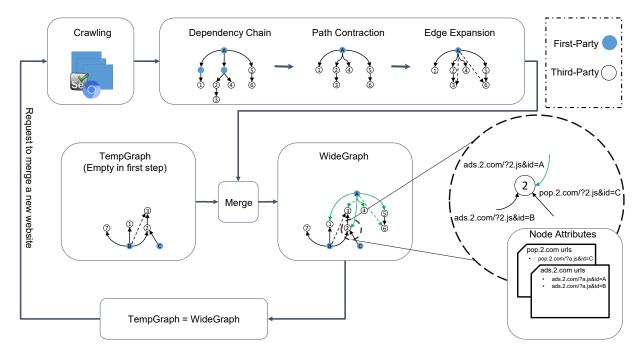


Fig. 5: WideGraph construction. Each node with same domain and interaction label, labeled as a unique number in this figure

are attributes for each node obtained from the edges connected to it. The node attribute of a particular node in the WideGraph is the aggregation of URLs, which have the same domain and interaction label of that node. As mentioned before, these attributes are grouped into documents based on the sub-domain of that node and allow us to extract strong content features from it. -Forth, Each sub-domain of a particular third party which has been initiated by a certain type of initiator (JS, Iframe, Media, or Other) is modeled as a document inside one of the nodes pertaining to that third party domain. As a result, each type-specified sub-domain has both structural (graphbased) features as it resides inside a node in the WideGraph and content features as all the information in the corresponding URLs are saved in its corresponding document. The reason for this approach of characterizing type-specific sub-domains is that some tracker companies generate different sub-domains for each costumer (as a kind of costumer's id). For example marketo.com (an Adobe company) requests follow this URL format: {munchkin-id}.mktoresp.com. As a result, modeling sub-domains with individual nodes may mislead the structural features. For example, we expect that nodes which should be considered to be a tracker, and hence, blocked, are among high degree nodes while it is not the case for companies which use sub-domains as customers' id. on the other hand, a company may offer different services on different domains and some of them are trackers and should be block and some of them are not. For example, consider two services of google company: adservice.google.com which should be blocked, and translate.google.com which should not be blocked. Therefore, our approach to treat sub-domains separately in the form of "documents inside third parties' nodes" allows us to both preserve important graph based features and classify services

based on sub-domains.

It is noteworthy that *WideGraph* is not the first attempt to build a graph out of web sessions. *Lightbeam* [31] was a browser's extension that generates and shows graphs of third-parties. However the graph they build, was a bipartite graph, first parties on one side and third parties on the other side, with only links between first and third parties, while the *WideGraph* contains more complete information with links between third parties. Fig. 4 shows the difference between dependency chains that we use and the star bipartite graph generated by *Lightbeam* and *Disconnect*, among others.

D. Feature Extraction

The next step is features extraction from the *WideGraph*. We focused on two types of features: "Structural features", which are obtained over the *WideGraph* and represents relationship between nodes in the graph, and "Content features" that only depend of the individual interaction made between nodes. In the forthcoming we will describe them both.

1) Structural Features: We extracted for each node in the *WideGraph*, some structural features. For calculating these features we used the Refex algorithm [22]. This algorithm uses a recursive procedure to extract features from basic features. It basically uses three simple graph properties per node, which are the degree of the node, the "ego interconnectivity", *i.e.*, the number of edges interconnecting direct node neighbors, and the "ego out-degree", *i.e.*, the number of edges connecting neighbors to other parts of the graph.

In our approach to extract graph-based features, we adopted Refex in the same way but append more basic features for each of nodes including in and out-degrees, direct and indirect coverage. Furthermore, in our implementation, we used a pruning function that evaluates correlation between features and drops features with high correlation.

2) **Content Features**: Content features are obtained by looking at individual interactions between nodes in the *Wide-Graph*. Trackers usually use XMLHTTP Requests for sending profile and tracking information to their server. These requests generally follow typical patterns that makes them easy to detect. These patterns are the one used generally by adblockers to filter trackers.

We have considered two types of features to extract from individual interactions for each potential adblocker sub-domain: "engineered features", and "keywords". The engineered features are four basic metrics that are common in most of trackers, like the URL lengths (that is generally large for AdTrackers), the number of repetition of special keys like "&", "=" or "?," that are used to delimit values that are uploaded to AdTracker servers. We also add the type of nodes,*e.g.*, Js, Iframe, *etc.*, as an engineered feature.

Adblockers usually use precisely tuned "keywords" to detect trackers. Choosing, a set of effective keywords plays a critical role in the performance of tracker detection. We developed an automated way of extracting efficient keywords that uses the well-know Term FrequencyInverse Document Frequency (TF-IDF) statistics [39]. This metric is frequently used to evaluate how important a keyword is to a document in a collection. The TF-IDF score for a term t in a document d in a collection of documents \mathcal{D} is defined as :

$$\text{TFIDF}(t, d, D) = \log(1 + f_{t,d}) \cdot \log\left(\frac{|\mathcal{D}|}{1 + |(d \in \mathcal{D}: t \in d)|}\right)$$

where $f_{t,d}$ is the number of times that term t occurs in the document d. $|\mathcal{D}|$ is the number of documents and $|(d \in D : t \in d)$ is the number of document that contains the term t. So we first look at all potentially third-party AdTracker URL and apply a tokenizer splitting the URLs through "/", "?", "&", "=", "." and "-" characters and extracts potential keyword. We derived for each potential keyword extracted by the tokenizer it TF-IDF assuming that aggregation of URLs of a sub-domain is a separate document. We only saved the 1000 most frequent keywords and use them as a content feature vector. For each sub-domain this vector is a sparse vector with the TF-IDF value for keywords appearing in the URL and 0 elsewhere.

III. CLASSIFICATION

The aim of our approach is to develop a classifier that given "structural", "engineered" and "content" features extracted from an given sub-domain is predicting if the sub-domain is a AdTrackers or rather a benign.

A. Models

We tested two methods for building this classifier: a Deep Neural Network, and a Random Forest model. As the results of the Random Forest are slightly better and that Random Forest is more easy to implement into a fast classifier, we only report here only the results of the Random Forest model.

Random Forest consists of a number of decision trees that are applied over given features and give the classification outcome at its leafs. In our Random Forest fitting we used averaging to improve accuracy and reduce over fitting. We have used a Random Forest model with 250 trees.

B. Model fitting and learning

The learning set used for model fitting is generated by using third party sub-domain nodes in the WideGraph. We removed from the learning set all sub-domains with in-degree of domain less than 3. This is motivated by the structural hole theory fact that if an object only exists in one first-party website, it might be considered to be directly related to its father firstparty objects. Since some websites have at least two domain names or one of them is part of another website we consider only the sub-domains with in-degree of domain greater than 2, e.g., geforce.com calls nvidia.com/*/geforce and many of the third party of geforce.com and nvidia.com are the same. These removed sub-domains might also be AdTrackers that have been seen only a single time but it's clear that an object used by at most two websites doesnt bring a critical privacy threat [48]. However, they will be considered when they become more visible. This filtering step removed 14394 sub-domains out the 33372 potentially third party sub-domains we had initially in the WideGraph. We therefore have 18979 sub-domains node that remains. We select 80% of the nodes as the learning set and put aside the remaining 20% for evaluation.

We labelled the learning set with labels coming from the application of most popular filter list²: Easy List [11], Easy Privacy [12], Squid Blacklist [42], Fanboy's Social Blocking List [16] and Fanboy's Annoyance List [15]. These filter lists include more than 100K rules to distinguish whether a URL is an AdTracker. We did not try to separate advertisement site from trackers. We label a sub-domain as "AdTrackers", if at least one of URLs belonging to this sub-domain have been blocked by the filter lists.

The Random Forest model is therefore fitted by giving for each potential third-party sub-domain in the learning set a vector 1061 of its attributes: 1000 keywords resulting from content features, 5 engineered features and 56 structural features extracted from the *WideGraph* including direct and indirect coverage. This feature vectors generated by aggregating the features of all interaction URLs that are within that subdomain. We show the results of the fitted Random Forest tree in the next section.

IV. EVALUATION

In this section, we report and analyze the results of our trained classifier. First, we analyze most important features to that enrich our representation to detect ad/tracker sub-domains. Second, we examine the results of our classifier.

A. Feature Analysis

We first present an preliminary analysis of the features we are using for classification. We begin by looking at total degree of a node. We show in Fig. 6 for each value of degree the proportion of sub-domains that are labelled as AdTracker and

²We have used the *adblockparser* tool to label the URLs [3]




Fig. 6: Distribution rate of overall degree




Fig. 7: CCDF of direct coverage

Non-AdTrackers. As can be seen a larger proportion of subdomains of global degree less than 10 are in the non AdTracker group while the proportion inverses for degree larger than 10. However the plot also shows that the overall degree is not discriminative enough as 20% of very high degree nodes are still in the non-tracker category.

We show in Fig. 7 the Complementary Cumulative Distribution Function (CCDF) of the direct coverage obtained over the two class of sub-domains. As can be seen the direct coverage have a much more discriminant power than the overall degree. For example only 0.38% of non-AdTrackers have a direct coverage larger than 0.01, while 3% of AdTrackers have such a direct coverage. But this is still not as a large proportion of AdTracker have direct coverage that are small.

We also show in Fig. 8 the average percentage of occurrence of the keywords with largest TF-IDF in AdTracker and non AdTracker group. As can be seen some keyword are more prevalent in AdTrackers but they are also present in relatively large percentage of non-AdTrackers sub domains.

The analysis of individual features show that each have some discriminant power but no one of them can be used a simple decision metric. This is why we need to go to more complex machine learning mechanisms in order to combine




Fig. 8: Analysis of top effected keywords by AdTrackers

these different feature in order to be able to detect AdTrackers.

B. Classification results

We trained the Random Forest model with the 15183 subdomains in the training set. Each sub-domain was transformed into an array of 1061 features as explained above. The random was set to use 250 trees. The training set contained 58% of AdTracker labelled entries and 42% of non-AdTracker labeled one. The training was done using the python scikit-learn toolkit and took less than 2 minutes to be completed on a single CPU core of a laptop. This is to compare with around 15 mins over a server with 4 cores for calibrating the Deep Neural Network that we are not describing here because of space limitation.

We thereafter applied the resulting Random Forest model to our evaluation set containing 3796 sub-domains. We present the obtained result in Table I. Before going further we clarify the definition of false positives and false negatives.

- False positives: the Random Forest classifier predicts that a particular sub-domain is an AdTrackers, while the filter lists have labelled it as not AdTrackers.
- False negatives: the Random Forest classifier predicts that a particular sub-domain is not an AdTrackers, while the filter lists labelled it as AdTrackers.

With these definitions we can calculate for each class of sub-domains a precision and a recall value resulting into a confusion matrix. A global performance average, and a global accuracy for the classifier are also can be calculated.

Another important point is relative to the way of calculating the performance parameters. The popularity of different domain in the Alexa 10K domain is different, meaning that in the normal operation of a browser some domain will repeat more frequently that some other. moreover, the prevalence of AdTrackers have also large variation with some, like google analytic and ad services, appearing much more frequently that that some less used trackers. When we calculate the performance over the flow of incoming websites, we are introducing a bias related to the difference in popularity and prevalence of first domains and AdTracker, *i.e.*, the impact on performance of detecting correctly a popular AdTracker is much higher than detecting a more anecdotal one. An less bias approach will consist of giving the same weight to all sub-domains, whether they are popular or not, and to evaluate the performance over all potential AdTrackers rather than doing it over the set of trackers observed during a browsing experience. Unfortunately almost all papers in the literature adopt the first approach, rather the less biased and more correct second approach. The result of this practice that the high level performance reported in the literature are difficult to interpret and to compare, as we do not know if the very good performance is resulting from the popularity bias, or from the real good performance of the classifier. Moreover, using the second approach will let to lower classification performance.

In this paper we decided to report both performance metrics: the biased one and the unbiased. We show in Table I-a, the biased performance and show that we have been able to obtain 99.2% precision on AdTrackers observed during our crawling experience with the Alexa 10K top sites, and we achieved an average accuracy of 96.1%. These value are very much aligned with other performance reported in the literature, in particular recent state of the art papers [8], [26], [41]. However we report also in Table I-b, the unbiased performance we obtain. As expected this performance is less than the biased one. Nevertheless, we achieve 87.2% of accuracy over all subdomains.

We did a review of false positives cases, where the Random Forest was predicting an AdTracker and the filter list were not. Among these 220 false positive case we found 138 subdomains (62% of false positives) that are in fact trackers that have not been detected by filter lists. Meaning that the Random Forest model detected some new trackers compared to filter list. This validate the usability of our methodology to update automatically filter list after. After correcting the labels of these trackers we recalculated the performance and show it in table I-c. The corrected performance is now 90.9% of accuracy and 96.6% precision for AdTrackers. We did also an analysis of the false negatives sub-domains and observer that they were all with low popularity and have been referred by a limited number of other trackers. Our works can be extended to handle some of these sub-domains by adding new features from JavaScript APIs, and perceptual based features [43] as well.

V. RELATED WORKS

Many researchers are currently engaged in designing ad and trackers detectors using machine learning techniques. In this section we review these research work in the following sections.

A. HTTP-Based Approaches

These approaches try to find HTTP-based patterns to classify ad and trackers. For example, Bhagavatula et al. [7] used characteristics of the structure of the URL to train a machine that classifies ad-related URLs from non ad-related URLs. As

TABLE I: Classification Result

	Precision	Recall
Ad/Tracker Class	99.2%	95.5%
Non-Ad/Tracker Class	88.9%	97.8%
Macro Avg	94.0%	96.7%
Accuracy	96.1%	
(a))	
	Precision	Recall
Ad/Tracker Class	90.2%	87.7%
Non-Ad/Tracker Class	83.3%	86.6%
Macro Avg	86.8%	87.1%
Accuracy	87.2%	
(b))	
	Precision	Recall
Ad/Tracker Class	96.6%	88.4%
Non-Ad/Tracker Class	83.3%	94.9%
Macro Avg	90.0%	91.7%
	90.9%	

a result, the features mostly include lexical based features and keywords. They show that their approach outperforms the filter-lists and it can find new ads that already have not been in the black list of the filter-lists. Gugelmann et al. [20] used HTTP traffic traces attributes like the size and the number of HTTP requests to train a machine learning model which classifies ads and analytic services. They evaluated their model on real traffic traces of a campus network and found new privacy-intrusive services. Yu et al. [51] also analyzed HTTP requests and used a method to find tracker domains by looking for the third party objects that receive similar unique patterns from a large number of first parties.

B. JavaScript Approaches

Since lots of third party services use JavaScripts, many researchers have tried to detect and analyze third party services by extracting features from JavaScripts. In this approach, static JavaScript codes have been analysed separately or along with other features related to JavaScript access to train a model that distinguishes between tracker and non tracker JavaScripts. In [23], Ikram et al. used supervised machine learning by using syntactic and semantic features from JavaScript files to predict that a JavaScript is malicious or not. Wu et al. [48] used machine learning to classify whether a JavaScript code unit is tracking related or not. Also they identified HTTP requests generated by the third-party tracking JavaScript. In [27], Kaizer and Gupta trained a classifier with features related to JavaScript access, cookie access, and URL information to detect machine based trackers. While these approaches achieve high-grade accuracy, most of them are not robust against obfuscation techniques [49], [50], [28].

C. Extended Approaches

In order to increase accuracy and robustness, researches used multiple types of objects. For example, Cozza et al. proposed a hybrid method that used both machine learning and filter-lists if an ad/tracker is new or not [8]. They applied their model on JavaScript and HTTP requests. Authors in [6] used HTML and HTTP information to building a graph of resource-hosting domains from Document Object Model (DOM) hierarchy of each website. They leverage machine learning to classifies web tracking domains. In [26], Iqbal et al. propose Adgraph and design a ML classifier that take as input the structural and content features of it for each website individually. Authors in [41] extend the Adgraph work by adding perceptual classifier to generate rules to update filter lists for under-served regions (non-English regions). This is similar to our approach as we also use an offline process to find more hidden trackers from a larger perspective to update the filter lists.

To the best of our knowledge, our paper is the first try to comprehensively collect and analyze the interactions between the objects on web pages on large scale to detect hidden ads and trackers. As our evaluations have shown, we are able to find ads and trackers that we had never seen before in training set.

VI. CONCLUSION

Third-party tracker services are very dynamic and may change their behavior repeatedly. So this circumstance leads to most previous works became vulnerable, especially the ones that are only based on URLs pattern or code analysis. In this paper we present a holistic approach that considers conventional features, such as URLs and Javascripts' contents, and the behavior of the third parties which serve the top 10K Alexa's websites. In contrast to the most state-of-the-art machine learning approaches in this area in which a separate dependency graph is constructed and analyzed for individual websites, our proposed method builds a large scale WideGraph by properly merging the dependency graphs of individual websites. Using WideGraph, we can encode the third parties' specific roles in the whole network into structural (graphbased) features. Using strong content and structural features, we have trained a Random Forest model to classify third party nodes into tracker and non-tracker categories. The resulted classifier has showed high degree of robustness to dynamic behavior of third party nodes, reached to 96.1% biased and 90.9% unbiased accuracy, and uncovered hundreds of new trackers that are not hit by filter-lists at the time of this writing.

ACKNOWLEDGEMENT

We would like to thank Dr. Mehdi Naderi Soorki, Ms. Masoume Zareh, and Mr. Hamed Yazdi for their contribution and constructive feedback in the early stage of this research work.

REFERENCES

- [1] Adblock. https://getadblock.com.
- [2] Adblock plus. https://adblockplus.org.
- [3] adblockpaerser. https://github.com/scrapinghub/adblockparser.
- [4] Alexa top 1 million sites. http://s3.amazonaws.com/alexa-static/top-1m. csv.zip.
- ANTHES, G. Data brokers are watching you, 2014. BAU, J., MAYER, J., PASKOV, H., AND MITCHELL, J. C. A promising direction for web tracking countermeasures. Proceedings of W2SP (2013).

- [7] BHAGAVATULA, S., DUNN, C., KANICH, C., GUPTA, M., AND ZIEBART, B. Leveraging machine learning to improve unwanted resource filtering. In Proceedings of the 2014 Workshop on Artificial Intelligent and Security Workshop (2014), pp. 95-102.
- [8] COZZA, F., GUARINO, A., ISERNIA, F., MALANDRINO, D., RA-PUANO, A., SCHIAVONE, R., AND ZACCAGNINO, R. Hybrid and lightweight detection of third party tracking: Design, implementation, and evaluation. Computer Networks 167 (2020), 106993.
- [9] Disconnect. https://disconnect.me.
- DUDYKEVYCH, V., AND NECHYPOR, V. Detecting third-party user [10] trackers with cookie files. In 2016 Third International Scientific-Practical Conference Problems of Infocommunications Science and Technology (PIC S&T) (2016), IEEE, pp. 78-80.
- [11] Easylist. https://easylist.to/easylist/easylist.txt.
- [12] Easyprivacy. https://easylist.to/easylist/easyprivacy.txt.
- [13] ENGLEHARDT, S., AND NARAYANAN, A. Online tracking: A 1-millionsite measurement and analysis. In Proceedings of the 2016 ACM SIGSAC conference on computer and communications security (2016), pp. 1388-1401.
- [14] FALAHRASTEGAR, M., HADDADI, H., UHLIG, S., AND MORTIER, R. Anatomy of the third-party web tracking ecosystem. arXiv preprint arXiv:1409.1066 (2014).
- [15] Fanboy's annoyance list. https://easylist.to/easylist/fanboy-annoyance. txt.
- [16] Fanboy's social blocking list. https://easylist.to/easylist/fanboy-social. txt.
- [17] GARIMELLA, K., KOSTAKIS, O., AND MATHIOUDAKIS, M. Adblocking: A study on performance, privacy and counter-measures. In Proceedings of the 2017 ACM on Web Science Conference (2017), pp. 259-262.
- [18] GERVAIS, A., FILIOS, A., LENDERS, V., AND CAPKUN, S. Quantifying web adblocker privacy. In European Symposium on Research in Computer Security (2017), Springer, pp. 21-42.
- [19] Ghostery. https://ghostery.com.
- [20] GUGELMANN, D., HAPPE, M., AGER, B., AND LENDERS, V. An automated approach for complementing ad blockers blacklists. Proceedings on Privacy Enhancing Technologies 2015, 2 (2015), 282-298.
- [21] HASHMI, S. S., IKRAM, M., AND KAAFAR, M. A. A longitudinal analysis of online ad-blocking blacklists. arXiv preprint arXiv:1906.00166 (2019).
- [22] HENDERSON, K., GALLAGHER, B., LI, L., AKOGLU, L., ELIASSI-RAD, T., TONG, H., AND FALOUTSOS, C. It's who you know: graph mining using recursive structural features. In Proceedings of the 17th ACM SIGKDD international conference on Knowledge discovery and data mining (2011), pp. 663-671.
- [23] IKRAM, M., ASGHAR, H. J., KAAFAR, M. A., MAHANTI, A., AND KRISHNAMURTHY, B. Towards seamless tracking-free web: Improved detection of trackers via one-class learning. Proceedings on Privacy Enhancing Technologies 2017, 1 (2017), 79-99.
- [24] IKRAM, M., MASOOD, R., TYSON, G., KAAFAR, M. A., LOIZON, N., AND ENSAFI, R. The chain of implicit trust: An analysis of the web third-party resources loading. In The World Wide Web Conference (2019), pp. 2851-2857.
- [25] IQBAL, U., SHAFIQ, Z., AND QIAN, Z. The ad wars: retrospective measurement and analysis of anti-adblock filter lists. In Proceedings of the 2017 Internet Measurement Conference (2017), pp. 171-183.
- [26] IQBAL, U., SNYDER, P., ZHU, S., LIVSHITS, B., QIAN, Z., AND SHAFIQ, Z. Adgraph: A graph-based approach to ad and tracker blocking. In Proc. of IEEE Symposium on Security and Privacy (2020).
- [27] KAIZER, A. J., AND GUPTA, M. Towards automatic identification of javascript-oriented machine-based tracking. In Proceedings of the 2016 ACM on International Workshop on Security And Privacy Analytics (2016), pp. 33-40.
- [28] LE, H., FALLACE, F., AND BARLET-ROS, P. Towards accurate detection of obfuscated web tracking. In 2017 IEEE International Workshop on Measurement and Networking (M&N) (2017), IEEE, pp. 1-6.
- [29] LERNER, A., SIMPSON, A. K., KOHNO, T., AND ROESNER, F. Internet jones and the raiders of the lost trackers: An archaeological study of web tracking from 1996 to 2016. In 25th {USENIX} Security Symposium ({USENIX} Security 16) (2016).
- [30] LI, Z., ZHANG, K., XIE, Y., YU, F., AND WANG, X. Knowing your enemy: understanding and detecting malicious web advertising. In Proceedings of the 2012 ACM conference on Computer and communications security (2012), pp. 674-686.

- [31] Lightbeam. https://github.com/mozilla/lightbeam.
- [32] MERZDOVNIK, G., HUBER, M., BUHOV, D., NIKIFORAKIS, N., NE-UNER, S., SCHMIEDECKER, M., AND WEIPPL, E. Block me if you can: A large-scale study of tracker-blocking tools. In 2017 IEEE European Symposium on Security and Privacy (EuroS&P) (2017), IEEE, pp. 319– 333.
- [33] Network activity in chrome devtools. https://developers.google.com/ web/tools/chrome-devtools/network/reference.
- [34] NIKIFORAKIS, N., KAPRAVELOS, A., JOOSEN, W., KRUEGEL, C., PIESSENS, F., AND VIGNA, G. Cookieless monster: Exploring the ecosystem of web-based device fingerprinting. In 2013 IEEE Symposium on Security and Privacy (2013), pp. 541–555.
- [35] No script. https://noscript.net/.
- [36] Pagefair, 2020 global adblock report. https://blockthrough.com/2020/02/ 06/2020-adblock-report-3.
- [37] Privacy badger. https://eff.org/fr/node/99095.
- [38] PUJOL, E., HOHLFELD, O., AND FELDMANN, A. Annoyed users: Ads and ad-block usage in the wild. In *Proceedings of the 2015 Internet Measurement Conference* (2015), pp. 93–106.
- [39] RAMOS, J., ET AL. Using tf-idf to determine word relevance in document queries. In *Proceedings of the first instructional conference* on machine learning (2003), vol. 242, Piscataway, NJ, pp. 133–142.
- [40] Selenium. https://selenium.dev.
- [41] SJÖSTEN, A., SNYDER, P., PASTOR, A., PAPADOPOULOS, P., AND LIVSHITS, B. Filter list generation for underserved regions. In *Proceedings of The Web Conference 2020* (2020), pp. 1682–1692.
- [42] Squid blacklist. http://www.squidblacklist.org.

- [43] STOREY, G., REISMAN, D., MAYER, J., AND NARAYANAN, A. The future of ad blocking: An analytical framework and new techniques. arXiv preprint arXiv:1705.08568 (2017).
- [44] SU, J., LI, Z., GRUMBACH, S., IKRAM, M., SALAMATIAN, K., AND XIE, G. A cartography of web tracking using dns records. *Computer Communications 134* (2019), 83–95.
- [45] tldextract. https://github.com/john-kurkowski/tldextract.
- [46] VASTEL, A., SNYDER, P., AND LIVSHITS, B. Who filters the filters: Understanding the growth, usefulness and efficiency of crowdsourced ad blocking. arXiv preprint arXiv:1810.09160 (2018).
- [47] WILLS, C. E., AND UZUNOGLU, D. C. What ad blockers are (and are not) doing. In 2016 Fourth IEEE Workshop on Hot Topics in Web Systems and Technologies (HotWeb) (2016), IEEE, pp. 72–77.
- [48] WU, Q., LIU, Q., ZHANG, Y., LIU, P., AND WEN, G. A machine learning approach for detecting third-party trackers on the web. In *European Symposium on Research in Computer Security* (2016), Springer, pp. 238–258.
- [49] XU, W., ZHANG, F., AND ZHU, S. The power of obfuscation techniques in malicious javascript code: A measurement study. In 2012 7th International Conference on Malicious and Unwanted Software (2012), IEEE, pp. 9–16.
- [50] XU, W., ZHANG, F., AND ZHU, S. Jstill: mostly static detection of obfuscated malicious javascript code. In *Proceedings of the third ACM conference on Data and application security and privacy* (2013), pp. 117–128.
- [51] YU, Z., MACBETH, S., MODI, K., AND PUJOL, J. M. Tracking the trackers. In *Proceedings of the 25th International Conference on World Wide Web* (2016), pp. 121–132.